

BT-125G

1GE GPON ONU Product Specification

BT-125G model ONU is a user terminal device independently developed by BTPT in line with such industrial background. The device has built-in two-layer switching function. It is compact and compact, and is an FTTH optical network unit with high performance and low power consumption. BT-125G ONU can automatically switch GPON working mode and can be used in GPON network, which is very suitable for the application requirements of various data services in FTTH networking scenarios of various operators.



Features:

- Compliance with IEEE 802.3ah & itu-t g.984.x standard
- GPON:8 T-CONTs,32 GEM Ports
- Integrate OMCI remote configuration and maintenance
- Supports the WEB configuration function
- Layer 3 Home Gateway/CPE features with Hardware NAT, supports Route mode, etc
- Layer 2 Switching, support 802.1Q VLAN, 802.1P QOS, Bandwidth Control, Spanning Tree, etc
- Support firewall level Settings, support based on URL/MAC/ IP/ address frame filtering
- Support multicast IGMP v2 snooping,
- Supports the AES-128 algorithm for data encryption of downlink data.

Highlights:

- **Compatible with 95% Third-party OLTs (Including Huawei/ZTE/Fiberhome/BT-PON and so on)**
- Support GPON mode and switch mode automatically
- Support ONU auto-discovery/Link detection/remote upgrade of software
- Support IPv4/IPv6 dual mode
- Support Firewall function and IGMP multicast feature
- Support LAN IP and DHCP Server configuration
- Support Port Forwarding and Loop-Detect



Hardware Specifications

- Size: 90*90*24mm
- Optical signal access: GPON
- User interface: 1GE
- Indicator light: POWER/PON/LOS/LAN
- Button: Power switch Button, Reset Button
- Weight: 95g
- Power adapter input: 100V~240V AC, 50Hz~60Hz
- PowerSupply requirement: 12V DC, 0.5A
- Power consumption: <6w
- Working temperature: -10°C ~ +45°C
- Environment humidity: 5% ~ 95% (Non-condensing)

PON Interface

- Module type: SC/UPC or SC/APC
- Working wavelength: up 1310nm, down 1490nm
- TX Optical power value: 0.5~4dBm
- RX Optical power sensitivity: ≤ -28 dBm
- Transmission distance: 0~20km
- Transmission rate: Uplink 1000Mbps; downlink 1000Mbps

Ethernet Interface

- Interface type: RJ45
- Interface parameters: 1 x 10/100/1000Mbps auto adaptive Ethernet interfaces


Product Packing Size

Package included:




- ONU * 1 PC
- Power adaptor *1 PC
- Manual *1 PC
- Box *1 PC

Packing list:

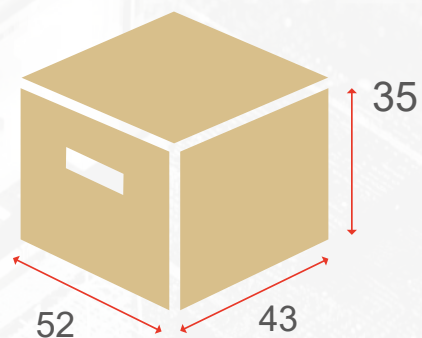

- 80pcs/Carton
- measurement: 52*43*35cm, 18.5kg


Interface :

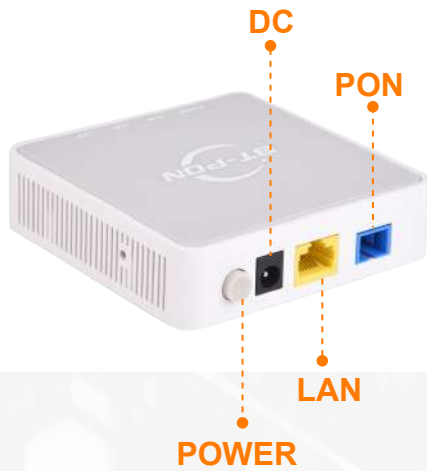

Compatible with OLT Huawei/
ZTE/Fiberhome

- DC
- POWER
- LAN
- PON

Application Scenario

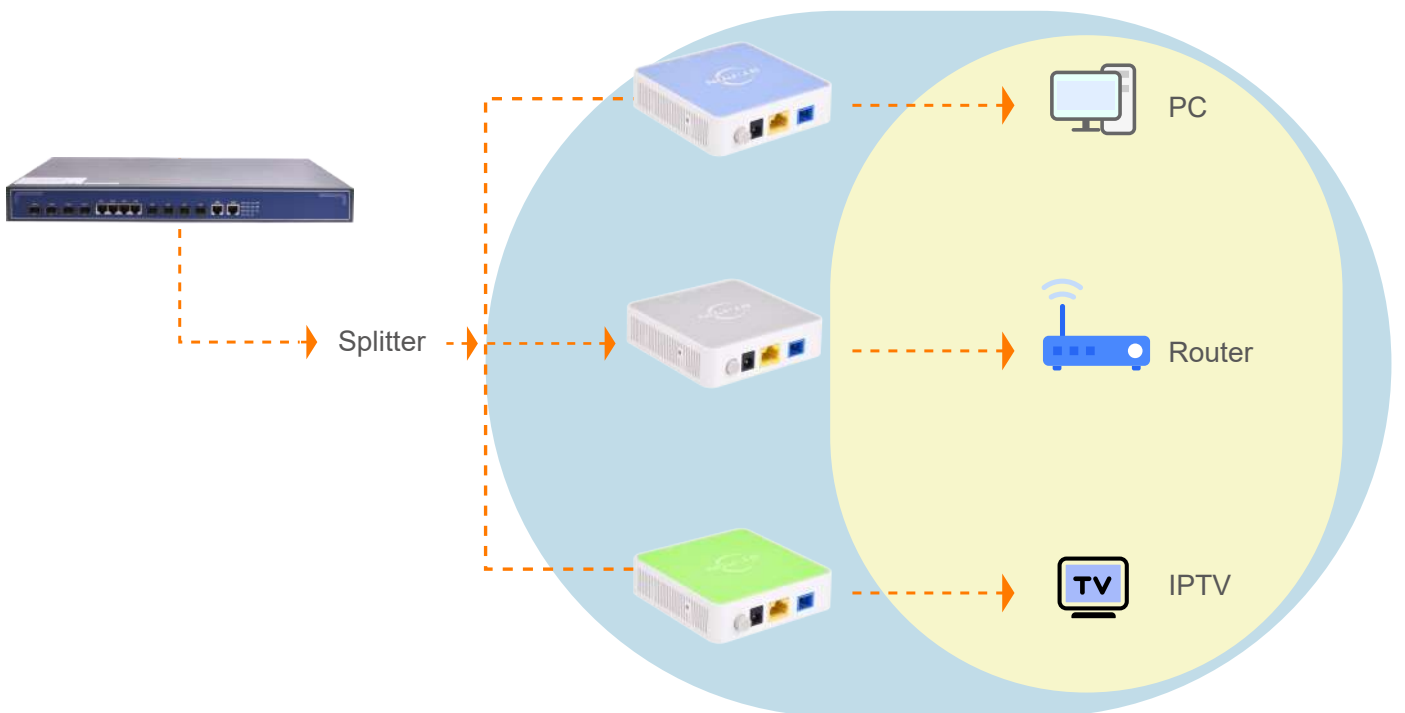

Color Type

- Green
- Blue
- Gray
- Pink
- Yellow



Company Introduction

Shenzhen Baitong Putian Technology Co., Ltd. has more than 10 years experience in fiber optical equipment industry since from 2008, specializes in the research and development of optical access network technology especially ONU and OLT. It provides integrated network transmission products such as voice, data, and video based on IP networks.

Service Support:

- Fully understand the needs of customers, and create value for customers with advanced technology, considerate service, and tailor-made solutions.
- Provides customers with a full range of after-sales service and technical support, and strive to create value for customers.

Company Mission:

- Fight for Access the world

Shenzhen Baitong Putian Technology Co., Ltd.

- 🌐 Website: www.bt-pon.com
- ✉ Email: marketing@bt-pon.com
- 📍 Address: 3rd Floor, Building B, Honghua Technology Innovation Park, Laowei First Industrial Zone, Longhua District, Shenzhen, China

