

BT-BCM6838G

1GE+3FE+VOIP+WLAN GPON ONU Product Specification

BT-BCM6838G/BT-BCM6838G+ model ONU is a user terminal device independently developed by BTPT in line with such industrial background. The device has built-in two-layer switching function and three-layer routing function. With compact structure and small appearance, it is a kind of FTTH GPON optical network unit with high performance and low power consumption, which is very suitable for the application requirements of various data services in FTTH networking scenarios of various operators.



Features:

- Compliance with IEEE 802.3ah & itu-t g.984.x standard
- GPON:8 T-CONTs,32 GEM Ports
- Integrate OMCI and TR-069 remote configuration and maintenance
- Layer 3 Home Gateway/CPE features with Hardware NAT, support Multiple WAN, Route/Bridge mode, etc
- Layer 2 Switching, support 802.1Q VLAN, 802.1P QOS, Bandwidth Control, Spanning Tree, etc
- Support firewall level Settings, support based on URL/MAC/ IP/ address frame filtering
- Support multicast IGMP v2 proxy/ snooping, support MLD proxy/ snooping
- Qos supports PQ, WRR, and CAR queue scheduling

- Support DDSN, ALG, DMZ and UPNP

Highlights:

- Compatible with Huawei,ZTE and Fiberhome OLT
- Support PPPoE/ Static IP/ DHCP
- Support IPv4, IPv6 and IPv4/IPv6
- Provide 300Mbps 2.4GHz Wireless , support multiple SSID Setting
- Provide POTS interface, support SIP protocol , POTS integrated circuit test complies GR-909
- Chipset :Broadcom

Hardware Specifications

- Size: 136*45*166mm
- Optical signal access: 1*GPON
- User interface:
1GE+3FE+VOIP+WLAN+1USB/ 4FE+VOIP+WLAN+1USB
- Indicator light:
POWER/WPS/WLAN/USB/LAN1/LAN2/LAN3/LAN4/TEL/INTERNET/LOS/PON
- Button: Power switch Button, Reset Button, WLAN Button, WPS Button
- Weight: 300g
- Power adapter input: 100V~240V AC, 50Hz~60Hz
- PowerSupply requirement: 12V DC, 1.5A
- Power consumption:<10w
- Working temperature: -10°C ~ +45°C
- Environment humidity: 5% ~ 95% (Non-condensing)

Wireless

- Working mode: IEEE 802.11 b/g/n
- Antenna pattern: External 2T2R External antenna
- Antenna gain: 5dBi
- Wireless bandwidth: Support 20MHz/40MHz
- Interface rate: Maximum rate 300Mbps
- SSID: Up to 4 SSID broadcasts are supported

PON Interface

- Module type: GPON Class B+ SC/PC
- Working wavelength: up 1310nm, down 1490nm
- TX Optical power value: 0.5~4dBm
- RX Optical power sensitivity:
- Receiver sensitivity: -27dBm
- Transmission distance: 0~20km
- Transmission rate: Uplink 1.244Gbps; downlink 2.488Gbps

Ethernet Interface

- Interface type: RJ45
- Interface parameters: 1*10/100/1000Mbps and 3*10/100Mbps or 4*10/100Mbps auto adaptive Ethernet interfaces

POTS interface

- Interface type: 1* RJ11
- Voice agreement: SIP
- Codecs: G.711/G.723/G.726/G.729
- Integrated circuit protocol: Gr-909 protocol is applicable


Product Packing Size

Package included:



- ONU * 1 PC
- Power adaptor *1 PC
- Manual *1 PC
- Box *1 PC

Packing list:

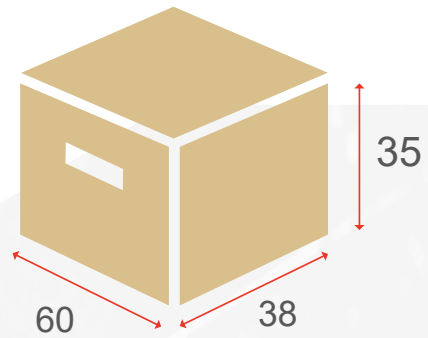

- 32pcs/carton
- measurement: 60*38*35cm/carton
- GW :16kg/carton

Interface :

USB ●

RESET ●

POWER ●

DC ●

LAN ●

TEL ●


PON ●



Compatible with OLT Huawei/ ZTE/Fiberhome

- USB
- RESET
- POWER
- DC
- LAN
- TEL
- PON

Application Scenario

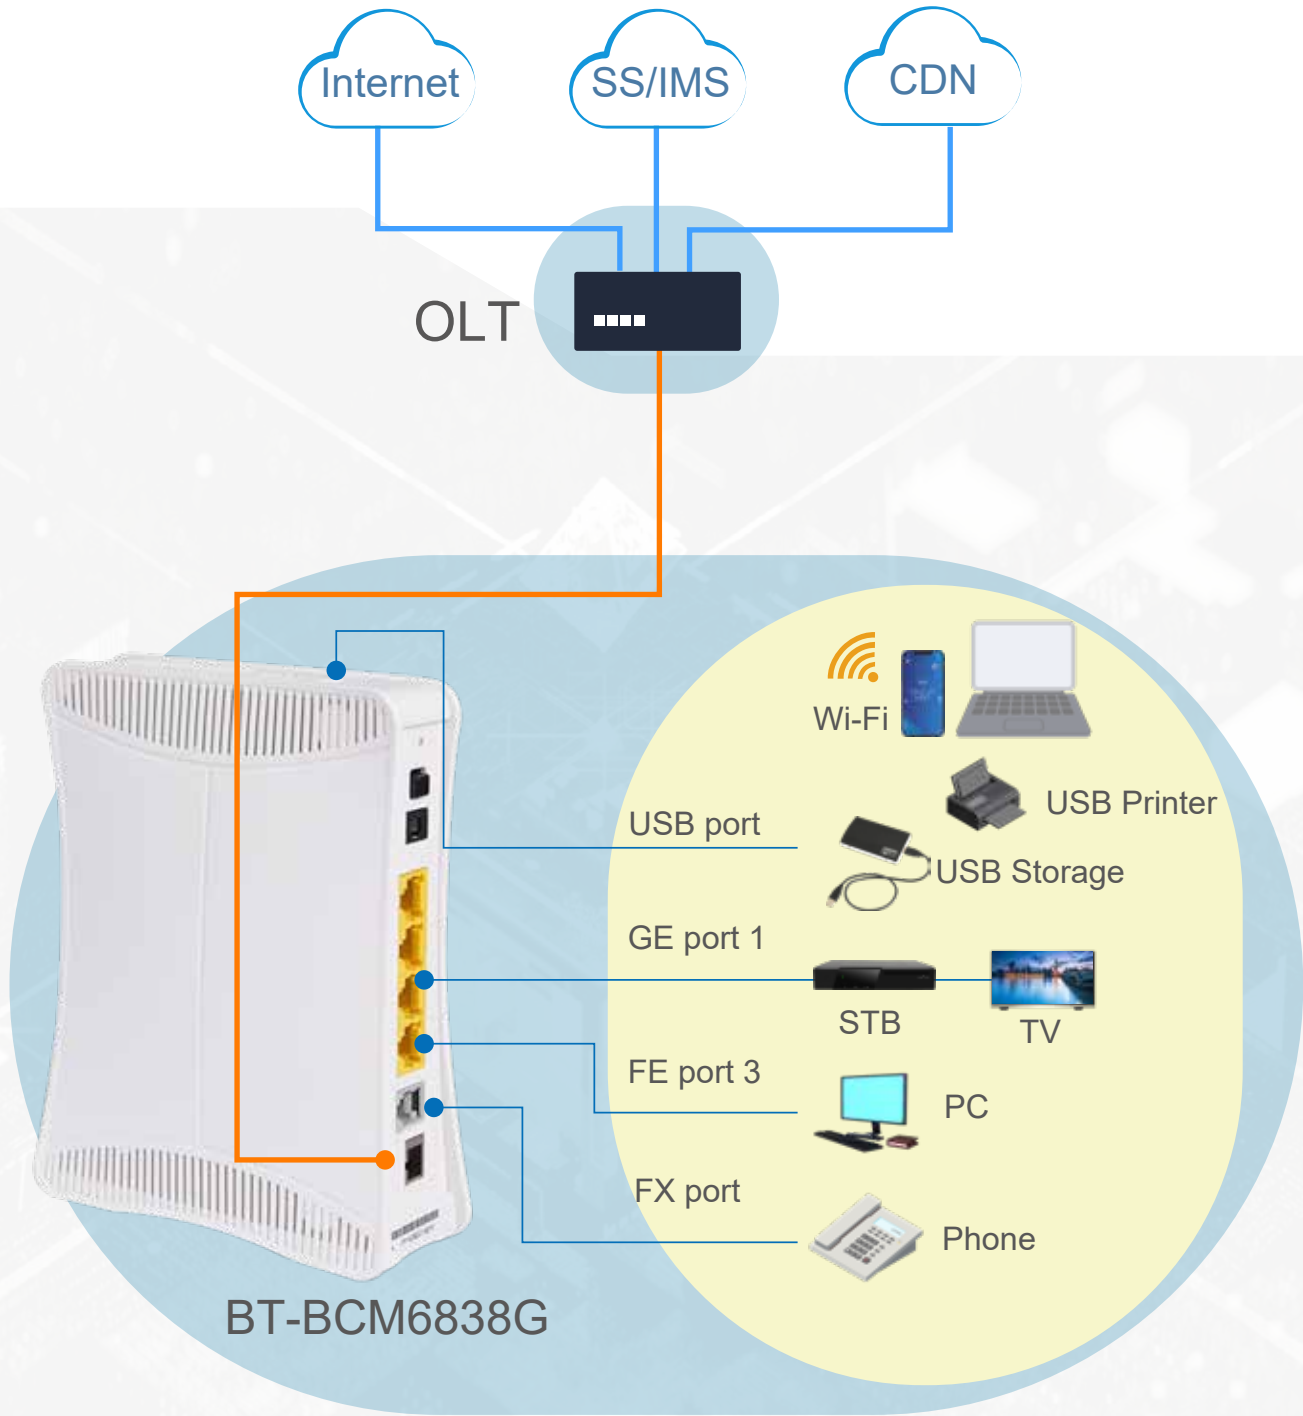



Company Introduction

Shenzhen Baitong Putian Technology Co., Ltd. has more than 10 years experience in fiber optical equipment industry since from 2008, specializes in the research and development of optical access network technology especially ONU and OLT. It provides integrated network transmission products such as voice, data, and video based on IP networks.

Service Support:

- Fully understand the needs of customers, and create value for customers with advanced technology, considerate service, and tailor-made solutions.
- Provides customers with a full range of after-sales service and technical support, and strive to create value for customers.

Company Mission:

- Fight for Access the world

Shenzhen Baitong Putian Technology Co., Ltd.

- 🌐 Website: www.bt-pon.com
- ✉ Email: marketing@bt-pon.com
- 📍 Address: 3rd Floor, Building B, Honghua Technology Innovation Park, Laowei First Industrial Zone, Longhua District, Shenzhen, China

