



# BT-718XR

2GE+CATV+AC1200  
XPON ONU Product Specification



## Product Overview

BT-718XR model ONU is a user terminal device independently developed by BTPT in line with such industrial background. The device has built-in two-layer switching function and three-layer routing function. With compact structure and small appearance, it is a kind of FTTH optical network unit with high performance and low power consumption, which is very suitable for the application requirements of various data services in FTTH networking scenarios of various operators. BT-718XR is an XPON product that can be adapted to EPON and GPON networks without replacing equipment and firmware.

## Product Specifications

Hardware Specifications	
Size	160*115 *28mm
Optical signal access	1*GPON/EPON
User interface	2GE+CATV+AC1200
Indicator light	POWER/PON/LOS/LAN1/LAN2/2.4G/5G/WPS/CATV
Button	Power switch Button, Reset Button, WLAN Button, WPS Button
Weight	250g
Power adapter input	100V~240V AC, 50Hz~60Hz
PowerSupply requirement	12V DC, 1.5A
Power consumption	<10w
Working temperature	-10°C ~ +45°C
Environment humidity	5% ~ 95% (Non-condensing)
PON Interface	
Module type	SC / APC
Working wavelength	PON: up 1310nm, down 1490nm, CATV: 1550nm
TX Optical power value	0.5~4dBm
RX Optical power sensitivity	-27dBm
Transmission distance	0~20km
Transmission rate:	GPON:Up 1.244Gbps;down 2.488Gbps EPON:Up 1.244Gbps;down 1.244Gbps
Ethernet Interface	
Interface type	2*RJ45
Interface parameters	2*10/100/1000Mbps auto adaptive Ethernet interfaces

## Wireless

Working mode	IEEE 802.11 b/g/n/AC
Antenna pattern	External 2T2R External antenna
Antenna gain	5dBi
Wireless bandwidth	Support 20MHz/40MHz/80MHz
Interface rate	2.4G WLAN:Maximum rate 300Mbps 5.8G WLAN:Maximum rate 866Mbps
SSID	Up to 4 SSID broadcasts are supported

## CATV Interface

Optical receiving wavelength	1550±10nm
Optical reflection loss	≥45dBm
RF, WDM, optical power	+2~-15dBm
RF frequency range	47~1000MHz, RF output impedance: 75Ω
RF output level	78dBuV
AGC range	0~-12dBm
MER	≥32dB@-15dBm

## Features


- GPON:Compliance with IEEE 802.3ah & itu-t g.984.x standard
- GPON:8 T-CONTs,32 GEM Ports
- Integrate OMCI(GPON)/OAM(EPON) and TR-069 remote configuration and maintenance
- Layer 3 Home Gateway/CPE features with Hardware NAT, support Multiple WAN, Route/Bridge mode, etc
- Layer 2 Switching, support 802.1Q VLAN, 802.1P QOS, Bandwidth Control, Spanning Tree, etc
- Bi-directional FEC
- Support firewall level Settings, support based on URL/MAC/ IP/ address frame filtering
- Support multicast IGMP v2 proxy/ snooping, support MLD proxy/ snooping
- Qos supports PQ, WRR, and CAR queue scheduling
- Provide Maximum rate 300Mbps 2.4GHz Wireless interface, and Maximum rate 866Mbps 5.8GHz Wireless interface, 2T2R external antenna, support multiple SSID Settings
- Support DDSN, ALG, DMZ and UPNP

## Highlights

- Dual band Wi-Fi, Superior performance of Wireless 11n and 11ac Transmission
- Compatible with 95% Third-party OLTs (Including Huawei/ZTE/Fiberhome/BT-PON and so on)
- Support EPON/GPON mode and switch mode automatically
- Support Route PPPoE/DHCP/Static IP and Bridge mode
- Support CATV interface for Video Service , supporting remote control by OLT.
- Support ONU auto-discovery/Link detection/remote upgrade of software
- Support IPv4/IPv6 dual mode
- Support Firewall function and IGMP multicast feature
- Support LAN IP and DHCP Server configuration
- Support Port Forwarding and Loop-Detect

# Interface


Compatible with OLT Huawei/ZTE/Fiberhome

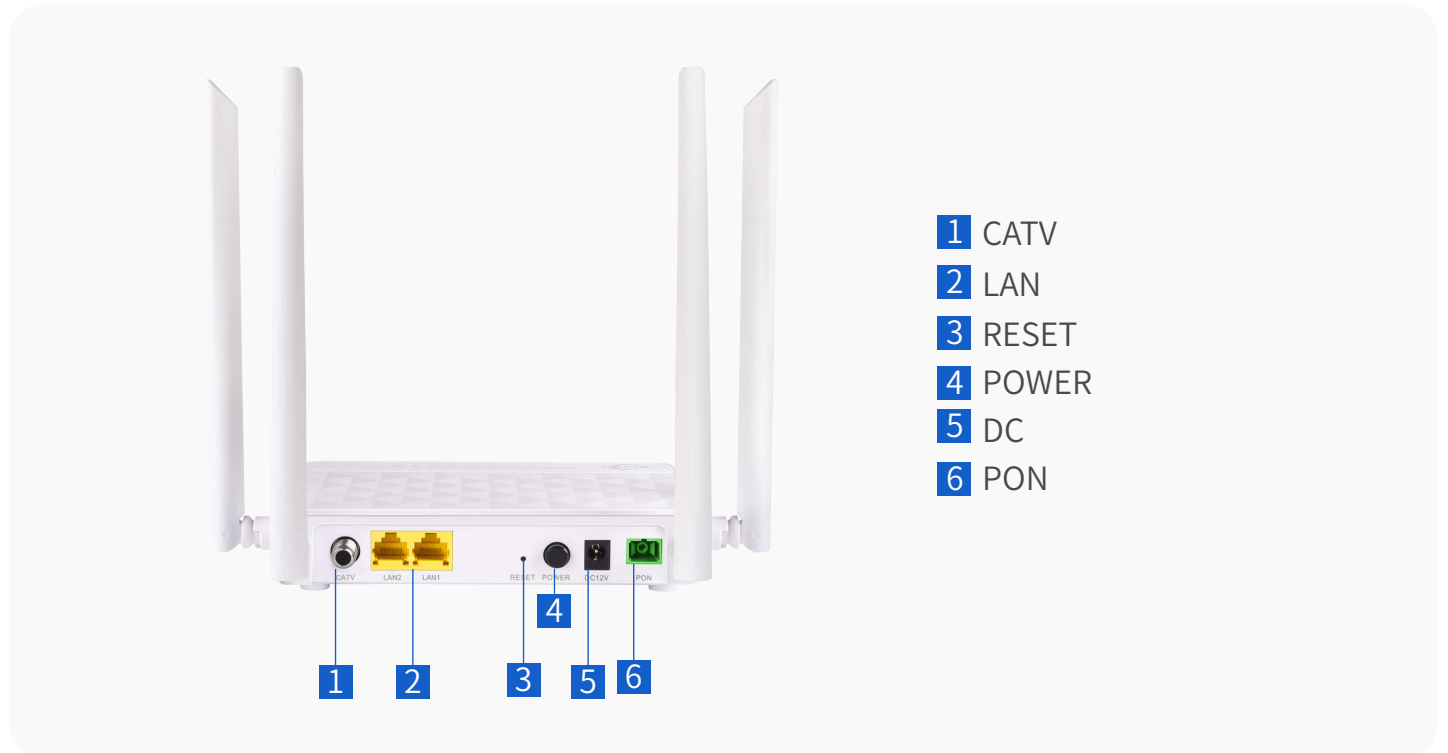

# Networking application

Typical access scheme: FTTH

Typical services: broadband Internet access, WIFI

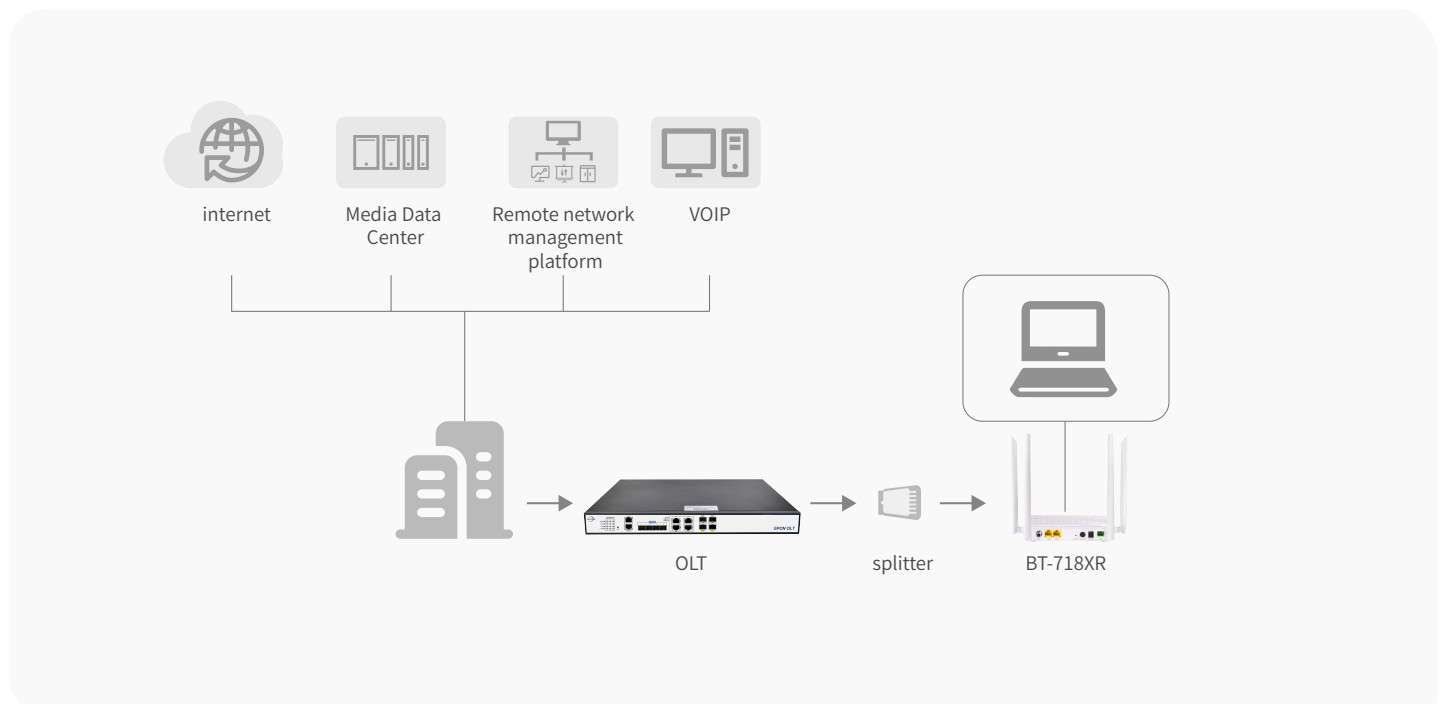

## Shenzhen Baitong Putian Technology Co., Ltd.

📍 3F, Building B, Honghua Technology Innovation Park, Longhua District, Shenzhen, China

✉ [marketing@bt-pon.com](mailto:marketing@bt-pon.com)

🌐 [www.bt-pon.com](http://www.bt-pon.com)

📺 <https://www.youtube.com/@btpon>

☎ 518000



Facebook



Website

All rights reserved 2022 Shenzhen Baitian Putian Technology Co., Ltd.. BT-PON™ letter and their patterns are registered trademarks of Shenzhen Baitian Putian Technology Co., Ltd.

The identification or brand ownership of the data and the Shenzhen Baitong Putian Technology Co., Ltd. or its partners have tried to ensure the accuracy of the text information and pictures mentioned in the information, but there is no guarantee that there is no writing or printing error errors. The company's correction or modification will not be notified separately, and the company reserves the right to make the final explanation within the legal scope.