

Product Overview

BT-P8116H OLT (Figure 1) is self-developed Compact 1U GPON OLT equipment, meeting the requirements of ITU-T G.984/G.988 and relative standards of China Telecom/Unicom GPON, possessing super GPON access capacity, carrier-class reliability and the complete security function. It can satisfy long-distance optical fiber access requirement on account of its excellent management, maintenance and monitoring capability, abundant service features and flexible network mode. BT-P8116H can be used with NMS2000 network management system so as to provide users with the perfect solution.

BT-P8116H OLT provides 16 *Downstream GPON ports, 4 * Uplink GE ETH ports and 4* Uplink 10G SFP+ ports. Up to 1:128 Split ratio for up to 2048 GPON users. The 1U pizzabox design is for easy installation, Maintenance and Space saving. BT-P8116H is suitable for Broadcast three in one, video surveillance network, enterprise LAN, Internet of Things, etc.



BT-P8116H

Product Specifications

Network interface	
GPON interface	16 x GPON (1.25/2.5 Gbps)
10GE Ethernet	4 x 10GE SFP+
1GE Ethernet	4 x RJ-45
PON interface	
GPON	ITU-TG.984.x standard
Local Management interface	
Console	RJ-45 EIA/TIA-232 Console management port
MGMT	1000BASE-T out-band management port
Performance	
Switching Capacity	148Gbps
Split ratio	1:128
Maximum ONU quantity	4096 GEM port-ids, 1024 T-CONT, 128 ONT
Power Supply and Consumption	
Power Adaptor	AC Input::100 to 240 V AC, 50/60 Hz; DC Input : 36V-75V(optional)
Redundancy Design	Pluggable double power supply, double AC, double DC and AC+DC
Consumption	<84 W
Environmental conditions	
Storage	temperature -10 to 70°C, rel. humidity 10–90% (non-condensing)
Operation	temperature 0 to 45°C, rel. humidity 10–90% (non-condensing)
Physical specifications	
Dimensions	440mm×400mm× 44mm(W * D *H)
Weight	< 6.5KG

Key Feature Support on BT-P8116H

Ethernet switching (L2) features	
VLAN	4K VLAN entries
	Port-based QinQ and Selective QinQ (StackVLAN)
	Port-based/MAC-based/IP subnet-based VLA
Spanning tree	IEEE 802.1x STP/RSTP/MSTP
	ONU remote loop detection
MAC	MAC Black Hole
	Port MAC limit
	64K MAC address
Port	Bi-direction bandwidth control
	Port mirroring and traffic mirroring

Service features	
Multicast	IGMPv1/v2/v3
	IGMP Snooping/Proxy
	IGMP filtering
QoS	Base on port or user-defined rate limitation
	Base on port or user-defined priority tag, provide 802.1P, DSCP tag ability of priority
	Base on port or user-defined high grade queue scheduling
	Priority queues and scheduler of SP, WRR and SP+WRR.
	Congestion avoidance system
Routing	BGP
	MPLS
	RIP
Security features	
User security	Anti-ARP-spoofing deceive defend
	Anti-ARP-flooding flooding attack automatic control
	IP, MAC, port and VLAN binding
	Port isolation
	TACACS+ Authentication
Device security	Defend DOS attack
	Security IP login through Telnet
	Hierarchical management and password protection of users
Network security	IP address、VLAN ID、MAC address and port manual binding
	Port broadcast /multi broadcast restrain
	Base on source / destination MAC address,VLAN,802.1p,ToS,DiffServ,source/ destination IP(IPv4/IPv6) address,TCP/UDP port number protocol type of IP package flow classify and flow defined regulation management,support package header 80 byte depth L2-L7 ACLflow filtrate
	Dynamic ARP table-based binding
	DHCP Option82 and PPPoE+ upload user's physical location
Network management	Command-line interface (CLI) , Console, Telnet and WEB configuration
	RMON (Remote Monitoring)1/2/3/9 groups of MIB
	System configuration with SNMPv1/v2/v3
	NTP(Network Time Protocol)
	NMS2000 network management

Ordering Information

Product	Description	Power Configuration	SFP Accessories
BT-P8116H	16*GPON 4*RJ45+4*SFP+	1*AC Power 2*AC Power 1*AC Power + 1*DC Power	GPON SFP Module C+/C++/C+++ 1G SFP Module 10G SFP Module


Product Packing Size

Package included:




- OLT * 1 PC
- Network cable * 1 PC
- Power cable * 1 PC
- Debug cable * 1 PC
- Handing Ears * 2 PCS

Packing list:

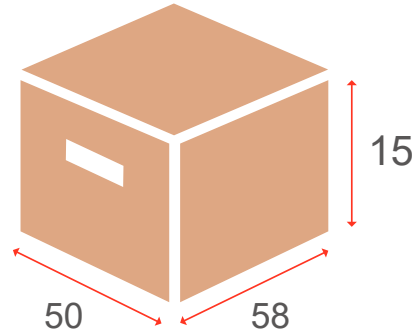

- 1PC/Box
Measurement: 58*50*15cm, 8kg
- 4PCS/Carton
Measurement: 62*59*51.5cm, 33.8kg

Interface

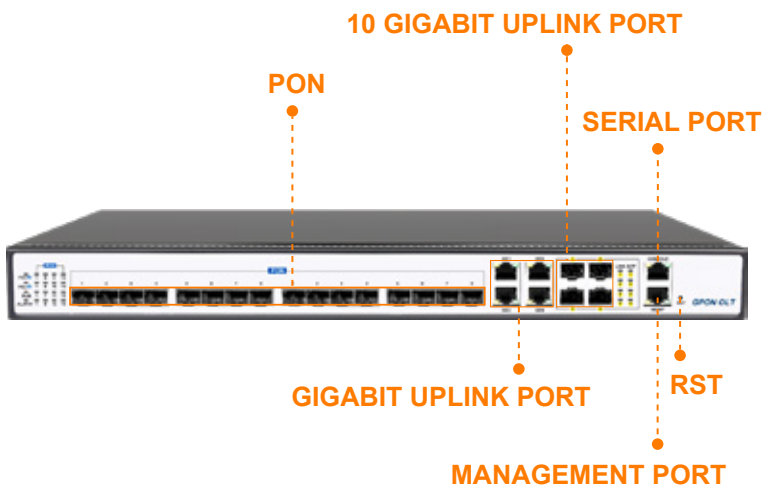

● Compatible with ONU Huawei/ ZTE/Fiberhome

- PON
- GIGABIT UPLINK PORT
- 10 GIGABIT UPLINK PORT
- MANAGEMENT PORT
- SERIAL PORT
- RST

Company Introduction

Shenzhen Baitong Putian Technology Co., Ltd. has more than 10 years experience in fiber optical equipment industry since from 2008, specializes in the research and development of optical access network technology especially ONU and OLT. It provides integrated network transmission products such as voice, data, and video based on IP networks.

Service Support:

- Fully understand the needs of customers, and create value for customers with advanced technology, considerate service, and tailor-made solutions.
- Provides customers with a full range of after-sales service and technical support, and strive to create value for customers.

Company Mission:

- Fight for Access the world

Shenzhen Baitong Putian Technology Co., Ltd.

- 🌐 Website: www.bt-pon.com
- ✉ Email: marketing@bt-pon.com
- 📍 Address: 3rd Floor, Building B, Honghua Technology Innovation Park, Laowei First Industrial Zone, Longhua District, Shenzhen, China

